

GASP Archives - Copyright 2024 Simplicity 5355 (1972) Size 14 Bust 36 Waist 28 Hip 38 Incomplete pattern missing pants

PDF File 1/2:

- Envelope front/back
- One page instruction sheet printed both sides

PDF File 2/2:

- Nine printed pieces
- Missing pieces: K pants front and L pants back

PDF contains two files 1/2: Instructions 2/2: Pieces . PDF is A0 format but may print A4 with Adobe tiling/poster instructions for personal use with Adobe Illustrator/InkScape/Affinity Designer or similar. Not for resale.

Ask for Simplicity Fashion Magazine
Designed for women who sew.
On sale at pattern counters and newsstands.

5355 Smole by \$100 IN SA-8 CANAD

Size 14 Bust 36" Waist 28" Miss




GASP Archives - 1972



5355





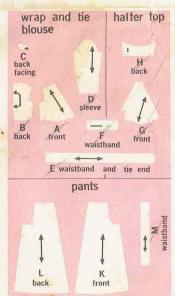

MISSES' WRAP AND TIE BLOUSE, HALTER TOP AND PANTS: The wrap and tie blouse and halter top are pleated to waistband and tie ends and fasten at side front. The blouse has long set-in sleeves. The pants have back zipper closing and waistband.

Suggested fabrics: Soft double knits, jersey, matte jersey, crepe, crepe-back satin, challis, cotton sateen, surah.

MISSES' WRAP AND TIE BLOUSE, HALTER TOP AND PANTS.

	elow waist eck to waist	31½ 24 33½ 15¾	32½ 25 34½ 16	34 26½ 36 16¼	36 28 38 16½	38 30 40 163/4	40 32 42 17	Ins
Fabric required	Sizes	8	10	12	14	16	18	
Tie Blouse		1700	1.00		- 40			
35" or 36" without na	р	21/4	23/8	23/8	25/8	25/8	23/4	Yds
44" or 45" " "		13/4	13/4	13/4	17/8	2	2	"
58" or 60" " "		11/2	11/2	11/2	11/2	11/2	15/8	- 11
Halter Top		1,10						Т
35" or 36" without na	p	2	2	21/8	21/8	21/4	23/8	"
44" or 45" " "		15/8	15/8	15/8	15/8	13/4	17/8	"
58" or 60" " "		11/2	11/2	11/2	11/2	11/2	15/8	"
Pants				- 110	-1			1
35" or 36" without na	р	43/8	43/8	43/8	43/8	41/2	51/8	"
44" or 45" " "		23/4	31/8	31/2	37/8	37/8	37/8	11
58" or 60" " "		21/2	21/2	21/2	21/2	21/2	21/2	- 11
Garment Measuremer	its				A NOT			
Finished back length of Finished length at side :		17 line sea	171/4	17½ nante	173/4	18	181/4	Ins
The state of the s	and the same wards	403/4	41	411/4	411/2	413/4	42	n
Bottom width of each	leg of pants	47	48	49	501/4	511/2	523/4	Ins


GASP Archives - 1972

metric chart converting inches and yards to centimeters and meters

Simplicity 5355 cutting and sewing directions



select pattern pieces for your view 11 pieces given

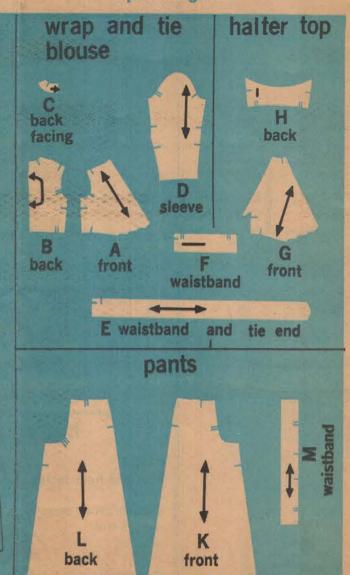

44"45" (115cm)

size 8

fabric without nap

NOTE: Cut one by N

How to use your Simplicity Pattern

read first...then sew!

1 . PREPARE YOUR PATTERN

Select and press pattern pieces.
Don't trim away margins.
Pattern is made to body
measurements with "ease"
allowed for design, fit
and comfort. Check your
back waist and dress length.
If necessary, alter the pattern
before placing it on fabric.

TO LENGTHEN: Cut pattern between printed lines. Place paper underneath. Spread pattern the necessary amount and pin to paper.

TO SHORTEN: At printed line, pin a pleat half the amount to be shortened [i.e. ½" (1, 2 cm) pleat to shortened.

1" (2, 5 cm)]. See Simplicity Sewing


Book for other pattern alterations.

2. KNOW YOUR PATTERN MARKINGS

STRAIGHT GRAIN: Place
an even distance from
selvage or a straight thread.

FOLD GRAIN: Place
on fold of fabric.

CUTTING LINE
LENGTHENING AND
SHORTENING LINES



STITCHING LINES:
For darts, seams etc.

NOTCHES: Blocked in for easier cutting.

SEAM ALLOWANCE:
5/4" (1, 5 cm) unless otherwise stated.

DOTS: Small... medium.

3. FABRIC AND CUTTING LAYOUTS

Press fabric. Unless fabric is pre-shrunk, shrink before cutting. Pay particular attention to washing or cleaning instructions with fabric. Circle cutting layout below for your view, size and fabric width.

FOR DOUBLE THICKNESS...Fold fabric with RIGHT side INSIDE. Place pattern on WRONG side of fabric.

FOR SINGLE THICKNESS...Place pattern on RIGHT side of fabric.
FOR NAP OR ONE-WAY DESIGN FABRICS...Use "with nap" cutting layout. BEFORE CUTTING...Pin all pattern pieces on fabric as in cutting layouts. Cut through pattern and fabric on cutting lines...cut notches out from cutting line ...margins will fall away.

Keep pattern pinned to fabric. Mark with tracing wheel and dressmaker's tracing paper, chalk or tailor's tacks. See Simplicity Sewing Book. Remove pattern

each piece as you sew.
STAY-STITCH...Machine-stitch through single thickness of fabric to prevent stretching of bias or curved edges...

from fabric and read directions on

done on seam line or 1/8" (3mm) from

seam line within the seam allowance. Stay-stitching is shown only in the first illustration.

PIN or BASTE SEAMS...Match notch 1 to 1, 2 to 2, etc. Use hand or machine-basting.

STITCH SEAMS...In direction of arrows on pattern. Press open unless otherwise stated. See Simplicity Sewing Book for additional sewing details.

Disregard any perforations on tissue pattern pieces

cutting layouts

printed side up.

key: black is fabric.
white is pattern

grey is pattern printed side down.


(The metric equivalent is in parenthesis)

GENERAL NOTE: When pattern pieces extend beyond fold of fabric, cut out all pieces except pieces that extend; then open out fabric and on single thickness, cut extending pieces on right side of fabric in position shown.

tie blouse

NOTE: Cut one by F.


35"36" (90cm) fabric without nap sizes 8, 10, 12




35"36" (90cm) fabric without nap sizes 14, 16, 18



44"45" (115cm) fabric without nap sizes 8, 10, 12, 14



44"45" (115cm) fabric without nap sizes 16, 18




58" 60" (150cm) fabric without nap all sizes




halter top


35" 36"
(90cm) fabric without nap sizes 8, 10, 12

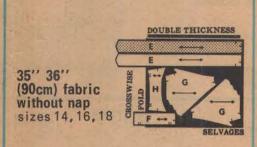




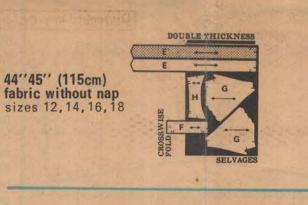

58"60" (150cm) fabric without nap all sizes NOTE: Cut one by F.



DOUBLE THICKNESS 35''36'' (90cm) fabric without nap sizes 8, 10, 12, 14, 16 NOTE: Cut one by M.

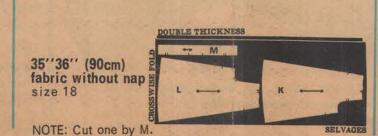

44"45" (115cm) fabric without nap size 12

DOUBLE THICKNESS

SELVAGES

SELVAGES

SELVAGES

SELVAGES

SELVAGES

SELVAGES

sewing directions

Shaded area is right side of fabric

The metric equivalent for inches is in parenthesis: 1/8" (3mm), 1/4" (6mm), 1/2" (1,2cm), 5/8" (1,5cm).

NOTE: Stitch 5/8" seams, unless otherwise stated, matching same numbered notches.


FOLLOW THESE FEW SIMPLE RULES FOR KNIT FABRICS:

Use loose but balanced tension and 10 to 12 stitches per inch (2,5cm).


Use nylon or polyester thread and a fine needle.
For zig-zag machine, stitch seams with a narrow zig-

To prevent shoulder seams from stretching, baste center of straight seam binding along seam line on front shoulder edges before stitching shoulder seams. Finish facings and hems, by stitching 1/4" from inner edges and pinking them.

wrap and tie blouse

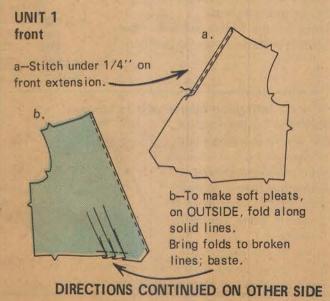

5355 sewing directions continued from other side

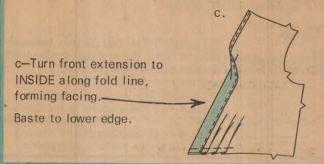

STAY-STITCHING UNIT 2 back Make darts; press toward center.

STAY-STITCHING UNIT 3 back facing and seams a-Stitch 1/4" from long unnotched Press under edge along stitching and stitch .-

b-With RIGHT sides together, pin facing to back neck edge, matching centers and small dots. Stitch neck edge. Trim seam; clip curves.



Stitch side seams. UNIT 4 sleeves To ease top of sleeve, stitch along seam line and 1/4" INSIDE seam line between notches, using a long. machine-stitch. Make elbow dart. Press down. Stitch underarm seam.


Press up hem. Finish hem with seam

binding or stretch lace; slip-stitch.

stitching sleeve unit to blouse With RIGHT sides together, pin sleeve in armhole with center small dot at shoulder seam, matching underarm seams and remaining small dots. Pull up machine-stitching to fit. Baste, easing in fulness. Stitch. Stitch again 1/8" FRONT from first stitching. Trim seam close to stitching.


Press seam toward sleeve, shrinking out fulness.

UNIT 5 waistband and tie ends

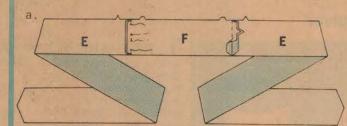


ENLARGED DETAIL

a-With RIGHT sides together, pin waistband and tie end sections (E) to waistband section (F) at side seams, matching small dots. Stitch RIGHT side seam, leaving openings between small dots, as shown. Stitch entire LEFT side seam.

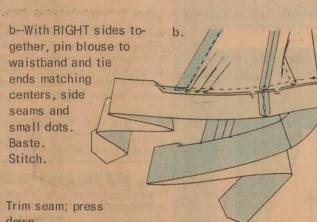


c-Fold waistband and tie ends in half, lengthwise RIGHT sides together. Stitch to small dots, as shown. Trim seams and corners.

Press under 5/8" on remaining edge of waistband;

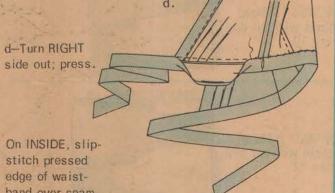


On INSIDE, slipstitch pressed edge of waistband over seam

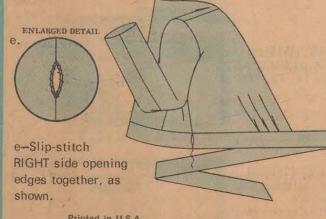


Printed in U.S.A. © Copyright 1972 by Simplicity Pattern Co. Inc.




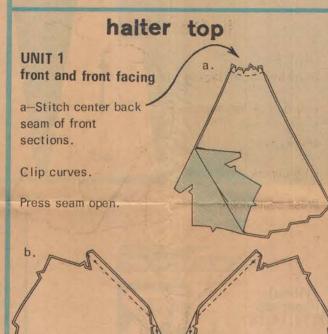


b-Stitch center back seam of facing sections. Clip curves. With RIGHT sides together, pin facing to front, matching centers, small and medium dots, having raw edges even. Stitch long unnotched edges, as shown. Trim seam; clip curves.

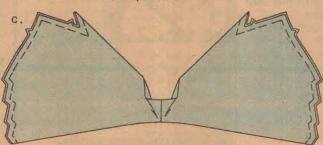


c-Turn facing to INSIDE; press. Machine-baste raw edges together.

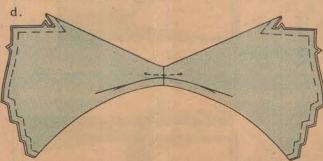


d-To make INSIDE tuck, on facing side, fold along solid line. Stitch along broken line. Press tuck, as shown.

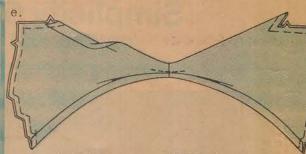

e-Turn finished edges to INSIDE along fold line, forming facings. (Do not press.) Baste across ends of facings, as shown.

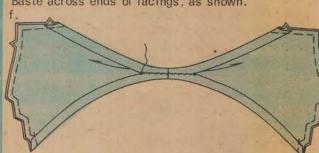

f-Slip-stitch facings together between medium dots, as shown.

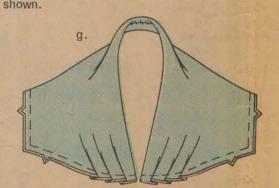

g-To make soft pleats at lower edge, on OUTSIDE, fold along solid lines. Bring folds to broken lines. Baste across lower edge.

UNIT 2 back and back facing a-Press under 5/8" on side edges of back facing; (single notched edges) trim to 1/4'

With RIGHT sides together, pin facing to back, matching small dots, having raw edges even. Stitch unnotched edge. Trim seam; clip curves.

b-With RIGHT sides together, pin front to back at side seams, matching small dots. Baste, being careful not to catch in pressed edge of back facing. Stitch. Trim seam. Press toward back. Slip-stitch pressed edge of facing over seam.

c-Machine-baste raw edges together.

For waistband and tie ends and finishing, see wrap and tie blouse, unit 5.

Make darts; press

Stitch center front

Stitch seam again


Clip curves.

toward center.

UNIT 1

front

seam.

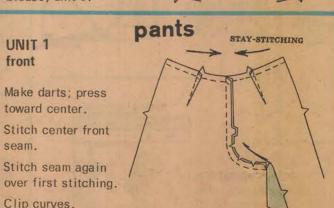


UNIT 2

Make darts; press toward center. Stitch center back seam to medium dot. Stitch seam again over first stitching. Clip curves.




zipper closing

Press under 5/8" on center back opening edges. Pin closed zipper under opening edges with tab end 1/2" below waistline seam line, having opening edges meet at center of zipper. Baste. Stitch, using a zipper



side and inner leg seams

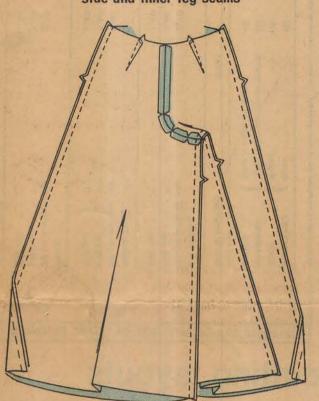


Stitch front to back at side seams. Stitch inner leg seam

UNIT 3 waistband a-Press under

5/8" on unnotched edge of waistband; trim to 1/4". b-With RIGHT sides

together, pin band to pants, matching centers and small dots. Baste, easing pants to fit waistband. Stitch. Trim seam; press toward band.

c-Fold band with RIGHT sides together. Stitch ends. Trim seam. On OUTSIDE, slip-stitch pressed edge of band



over seam. Lap ends; fasten with hooks and eyes.

leg hems Slip-stitch hem, easing in fulness.

Press up hem. Stitch one edge of seam binding or stretch lace 1/4" over raw edge.